

# PM8-AV

# PM8-AV

## HOME THEATER POWER MANAGEMENT

AC power, telephone and coax lines can provide direct pathways for surges and spikes to enter and damage expensive audio/video equipment.

PM8-AV eliminates voltage irregularities & protects your AV system.

### 1 SURGE PROTECTION

Exclusive Protect or Disconnect™ circuitry. In the event of a catastrophic surge such as lightning, it completely disconnects AC power to connected equipment.

### 2 IMPROVES PICTURE & SOUND QUALITY

The PM8-AV's Power Cleaning and Filtration eliminate common symptoms of contaminated power (including loss of detail, pops, hisses, hums and visual artifacts) and allows your A/V equipment to perform up to its full capability.



**Cable/Sat Protection**  
Protects equipment from electrical surges that travel over cable, satellite and antenna lines.



**Telephone line protection**  
Protects equipment from electrical surges that travel over telephone lines.



**Surge Protection**  
Exclusive Protect or Disconnect™ circuitry.



**Eight Outlets**  
More outlets for all of your power needs.



**Hi Def Ready**  
Hi-Def Designed to work with your High Definition system.



MODEL NO.  
PM8-AV



SPECIFICALLY DESIGNED AND ENGINEERED TO PROTECT:



**HD Flat Panel Display Systems**  
(Plasma, LCD, CRT's and Receivers)



# PM8-AV

## HOME THEATER POWER MANAGEMENT

### FEATURES


**Power ON/Protection OK LED**  
(green) Normally ON; indicates that the surge protector is functioning properly and that all connected equipment is protected.

**IN / OUT Telco Connectors**

**Ground OK LED**  
(green) Normally ON; indicates that the wall outlet is properly wired and grounded.

**CATV / Satellite Connectors**  
2 sets of IN /OUT, universal coaxial connectors

6 ft. Power Cord with Right Angle 45 degree Offset Plug

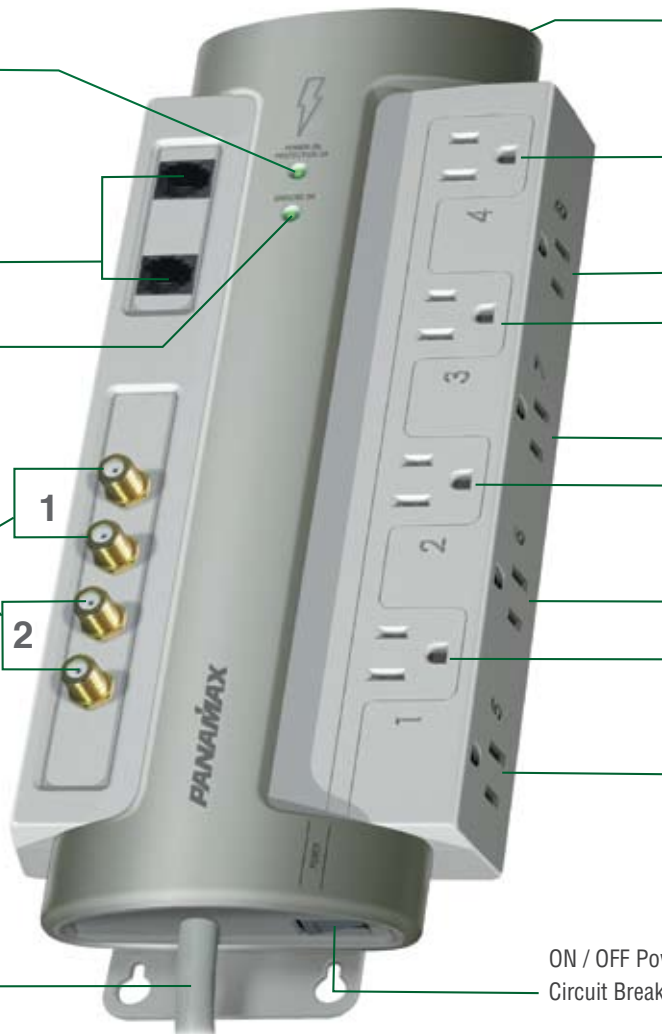

Accepts Panamax add on data line protection modules, (modules sold separately).

8 AC Outlets with transformer spacing between outlets

Accessory Included:  
3 ft. Coax Cable



ON / OFF Power Switch and Circuit Breaker Combination

### SPECIFICATIONS

#### AC Specifications:

Protect or Disconnect™ Circuitry \_\_\_\_\_ Yes  
Thermal Fusing \_\_\_\_\_ Yes  
Line Voltage \_\_\_\_\_ 120VAC, 50/60Hz  
Initial Clamping Level \_\_\_\_\_ 200V Peak, 141V RMS  
Voltage Protection Rating (UL1449 3rd Edition, 3,000A) \_\_\_\_\_ 500V  
Protection Modes \_\_\_\_\_ L-N, L-G, N-G  
Maximum Current Rating \_\_\_\_\_ 15A (1800W)  
EMI/RFI Noise Filtration \_\_\_\_\_ 45dB (100kHz – 1 MHz)  
Response Time \_\_\_\_\_ < 1ns  
Single Pulse Energy Dissipation \_\_\_\_\_ 1125 Joules  
Peak Impulse Current \_\_\_\_\_ 52,000 A

#### Telco Protection:

Fuseless/Auto-Resettable \_\_\_\_\_ Yes  
Clamping Level \_\_\_\_\_ 260V  
Capacitance \_\_\_\_\_ 30 pf (approx.)  
Suppression Modes \_\_\_\_\_ Metallic & Longitudinal  
Wires Protected \_\_\_\_\_ 2 wire, 1 pair (3,4)  
Connectors \_\_\_\_\_ RJ-11

#### Universal Cable / Satellite Protection:

HD Ready \_\_\_\_\_ Yes  
Bi-Directional \_\_\_\_\_ Yes  
Shielded \_\_\_\_\_ Yes  
Clamping Level \_\_\_\_\_ 75V  
Frequency Range \_\_\_\_\_ 0MHz – 2.2 GHz  
Insertion Loss \_\_\_\_\_ <0.5dB  
Connections \_\_\_\_\_ Female "F", Gold Plated

Design and specifications subject to change without notice due to product upgrades and improvements.

### UPC'S, QUANTITIES, WEIGHTS & MEASUREMENTS FOR ORDERING & SHIPPING

MODEL PM8-AV		SINGLE UNIT CARTON			MASTER CARTON			
Dimensions	Weight	Dimensions	Weight	UPC	Qty.	Dimensions	Weight	UPC
12" x 5" x 1.75"	3.5 lbs	13.25" x 9.5" x 2.5"	4 Lbs	0 50616 00872 3	6	17.25" x 8.5" x 14"	25 Lbs	50 050616 00872 8

(12.5 in. L. Including brackets)

www.panamax.com **PANAMAX**

# PM8-AV Warranty and Connected Equipment Policy Information

## CAUTION!

All Panamax Warranties and Connected Equipment Policies are valid only in the United States and Canada.

## CAUTION!

Audio/Video, computer and/or telephone system installations can be very complex systems, consisting of many interconnected components.

Due to the nature of electricity and surges, a single protector may not be able to completely protect complex installations. In those cases, a systematic approach using multiple protectors must be employed. Systematic protection requires professional design. AC power, satellite cables, CATV cables, telephone/network lines, signal lines or any other electrical conductors, entering the system that do not pass through this surge protector may invalidate the Panamax Connected Equipment Protection Policy. For additional information on how to protect your system, please contact Panamax before connecting your equipment to the surge protector.

## CAUTION!

### WARRANTY LIMITATION FOR INTERNET PURCHASERS

Panamax products purchased through the Internet do not carry a valid Product Warranty or Connected Equipment Protection Policy unless purchased from an Authorized Panamax Internet Dealer and the original factory serial numbers are intact (they must not have been removed, defaced or replaced in any way). Purchasing from an Authorized Panamax Internet Dealer insures that the product was intended for consumer use, has passed all quality inspections and is safe. Buying through auction sites or unauthorized dealers may result in the purchase of salvaged, failed and/or products not intended for use in the US. In addition, Authorized Panamax Internet dealers have demonstrated sufficient expertise to insure warranty compliant installations. For a list of Authorized Panamax Internet Dealers go to [www.panamax.com](http://www.panamax.com). If you have any questions regarding these requirements, please contact Panamax Customer Relations.

## Product Upgrade Program

If your Panamax power conditioner sacrifices itself while protecting your connected equipment, you have an option to upgrade to the latest technology. Please go to our web site [www.panamax.com](http://www.panamax.com) or contact Panamax Customer Relations at 800-472-5555 for details.

## Panamax Surge Protector Lifetime Limited Product Warranty

Panamax warrants to the purchaser of any standard Panamax surge protector that the surge protector shall be free of defects in design, material, or workmanship, and Panamax will repair or replace any defective unit. For product replacement see "NOTIFICATION" (3).

## Panamax Surge Protector Limited Connected Equipment Protection Policy

It is the policy of Panamax that it will, at its election, either replace, pay to replace at fair market value, or pay to repair, up to the dollar amount specified below, equipment that is damaged by an AC power, cable, telephone, or lightning surge while connected to a properly installed Panamax power conditioner. To be eligible for compensation, repair and or replacement, the power conditioner must show signs of surge damage or that it is operating outside of design specifications, relative to its surge protection capability, and under all of the circumstances failed to protect your connected equipment.

PM8-AV: \$100,000

THE CONNECTED EQUIPMENT POLICY IS SUBJECT TO THE FOLLOWING CONDITIONS AND LIMITATIONS

1. ORIGINAL OWNERSHIP REQUIREMENT: Panamax's connected equipment policy extends to the original purchaser of the Panamax product only and is non-transferable. Original purchase receipts must accompany any product return or claim for connected equipment damage.

2. PROPER INSTALLATION: Panamax AC protectors must be directly plugged into a properly grounded 3-wire AC outlet. Extension cords\*, non-grounded two prong adapters, or other non-Panamax surge

products must not be used. Building wiring and other connections to protected equipment must conform to applicable codes (NEC or CEC). No other ground wires or ground connections may be used. All wires (including, e.g., AC power lines, telephone lines, signal/data lines, coaxial cable, antenna leads) leading into the protected equipment must first pass through a single Panamax protector designed for the particular application. The protector and the equipment to be protected must be indoors in a dry location, and in the same building. Panamax installation instructions and diagrams must be followed

3. NOTIFICATION: You must notify Panamax within ten days of any event precipitating request for product replacement or payment for connected equipment damage. A return authorization (RA) number must first be obtained from the Panamax Customer Relations Department at [www.panamax.com](http://www.panamax.com)\*\* before returning the protector Panamax. At this time, you must notify Panamax if you believe you have a claim for damaged connected equipment. Once you obtain an RA number, please mark the number on the bottom of the unit and pack it in a shipping carton/box with enough packing material to protect it during transit. The RA number must also be clearly marked on the outside of the carton. Ship the unit Panamax. Please note that you are responsible for any and all charges related to shipping the unit to Panamax. If connected equipment damage was indicated on your RA request, Panamax will mail you claim kit to be completed and returned within 30 days. A connection diagram of your system will be required as part of the claim kit. Be sure to note its configuration before disconnecting your equipment.

4. DETERMINATION OF FAILURE: Panamax will evaluate the protector for surge damage. The Panamax protector must show signs of surge damage or must be performing outside (>10%) of design specifications relative to its surge protection capability. Opening the enclosure, tampering with, or modifying the unit in any way shall be grounds for an automatic denial your request for payment. Panamax, after evaluating all information provided, will determine whether or not your request is eligible for payment. If the surge protector shows no signs of AC power or signal line surge damage and is working within design specifications, Panamax will return the unit to you with a letter explaining the test results and notifying you of the rejection your claim. Exceptions: If a dealer or installer replaces the protector for the customer, replacement will be returned to the dealer installer; or if the protector is a pre-1996 model, it will be replaced; or, for a Canadian customer, the protector will be replaced. Panamax reserves the right to inspect the damaged connected equipment, parts, or circuit boards. Please note that you are responsible for any and all charges related to shipping

the damaged equipment to Panamax. Panamax also reserves the right to inspect the customer's facility. Damaged equipment deemed uneconomical to repair must remain available for inspection by Panamax until the claim is finalized.

5. REQUEST PAYMENTS: Once Panamax has determined that you are entitled to compensation, Panamax will, at its election, either pay you the present fair market value of the damaged equipment, or pay for the cost of the repair, or send you replacement equipment, or pay the equivalence of replacement equipment.

6. OTHER INSURANCE/WARRANTIES: This coverage is secondary to any existing manufacturer's warranty, implied or expressed, or any insurance and/or service contract that may cover the loss.

7. EXCLUSIONS: THE PANAMAX CONNECTED EQUIPMENT PROTECTION POLICY DOES NOT APPLY TO: Service charges, installation costs, reinstallation costs; setup cost; diagnostic charges; periodic checkups; routine maintenance; loss of use of the product; costs or expenses arising out of reprogramming or loss of programming and/or data; shipping charges or fees; service calls; loss or damage occasioned by fire, theft, flood, wind, accident, abuse or misuse, and products subject to manufacturer's recall or similar event.

8. DISPUTE RESOLUTION: Any controversy or claim arising out of or relating to Panamax's Connected Equipment Protection Policy, or the alleged breach thereof, shall be settled by arbitration administered by the American Arbitration Association under its Commercial Arbitration Rules. You may file for arbitration at any AAA location in the United States upon the payment of the applicable filing fee. The arbitration will be conducted before a single arbitrator, and will be limited solely to the dispute or controversy between you and Panamax. The arbitration shall be held in any mutually agreed upon location in person, by telephone, or online. Any decision rendered in such arbitration proceedings will be final and binding on each of the parties, and judgment may be entered thereon in a court of competent jurisdiction. The arbitrator shall not award either party special, exemplary, consequential, punitive, incidental or indirect damages, or attorney's fees. The parties will share the costs of arbitration (including the arbitrator's fees, if any) in the proportion that the final award bears to the amount of the initial claim.

9. GENERAL: If you have any questions regarding the product warranty or the connected equipment protection policy, please contact the Panamax Customer Relations Department at [www.panamax.com](http://www.panamax.com). The Limited Product Warranty and Connected

Equipment Policy herein supersedes all previous warranties and/or Connected Equipment repair/replacement policies.

THE LIMITED PRODUCT WARRANTY IS THE ONLY WARRANTY PROVIDED WITH THIS PANAMAX PRODUCT AND ANY OTHER IMPLIED OR EXPRESSED WARRANTIES ARE NON-EXISTENT.

This warranty may not be modified except in writing, signed by an officer of the Panamax Corporation.

\* The use of a Panamax extension cord or equivalent (UL or CSA listed, minimum 14AWG, 3-wire grounded) will not invalidate the warranty.

\*\* Forms are available on the Panamax web site for requesting RAs and opening a claim for connected equipment damage.

**PANAMAX**  
[www.panamax.com](http://www.panamax.com)  
800-472-5555

MODEL - PM8-AV
DOC. NO. Q01L0066_EN REV. A
Effective Date 8/09