
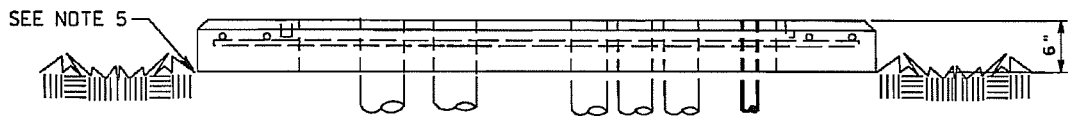


| REFERENCES |      |
|------------|------|
| GR&S       | UG   |
| STD.       | 1-17 |
| STD.       | 1-45 |
| STD.       | 7-16 |
| STD.       | 9-5  |
| SEC.       | 6    |

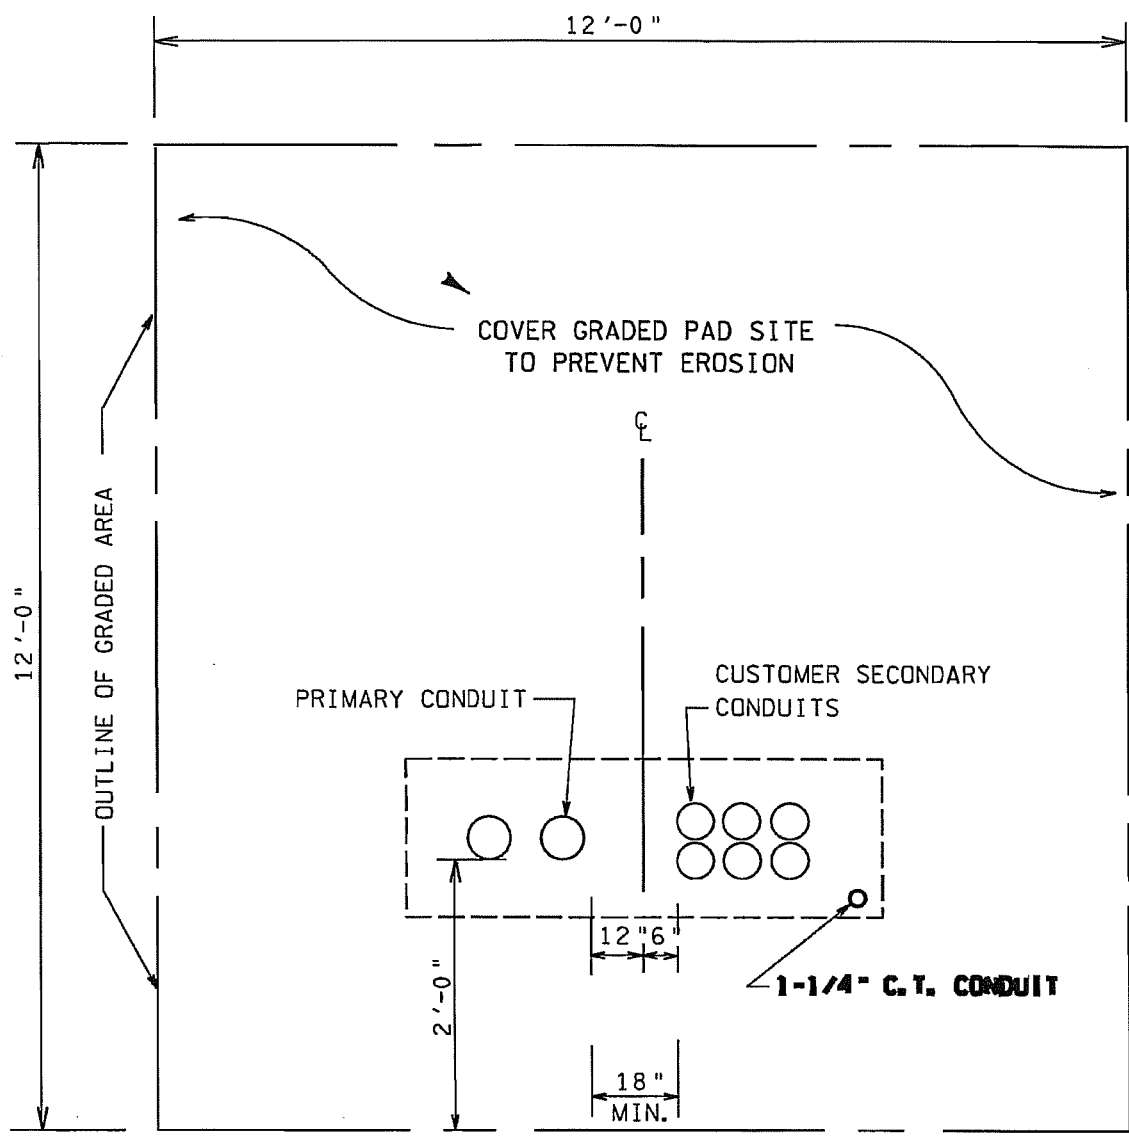

**NOTES:**

1. CUSTOMER CONDUIT MUST BE IN PLACE BEFORE PAD IS SET OR POURED.
2. PROVIDE 12'X12' COMPACTED AND FLAT LEVEL AREA AT FINISHED GRADE SEE OUTLINE ABOVE.
3. ALL CONDUITS TO HAVE 36" MIN. COVER
4. CUSTOMERS SECONDARY CABLE, WHEN INSTALLED TO BE MARKED & IDENTIFIED.
5. BOTTOM OF PAD TO BE EQUAL TO TOP OF SIDEWALK, SOD, DIRT, MULCH & CONCRETE, ETC.
6. FINISHED GRADE MARK TO BE NOTED ON PRIMARY CONDUIT WITH BLACK MARKER.
7. THE GRADED SITE SHALL BE COVERED WITH SOD OR SUITABLE PLASTIC TO PROTECT IT FROM EROSION.
8. SLOPED AREAS ADJACENT TO THE SITE MAY REQUIRE EROSION PROTECTION AT THE DIRECTION OF TEC PERSONNEL.

| 5   | MFK  | 6-15-06  | ADDED NOTES 7 & 8, COVER GRADED PAD SITE     |
|-----|------|----------|--|
| 4   | MFK  | 8-18-05  | ADDED NOTE 6, REVISED REFERENCE BLOCK        |
| 3   | MFK  | 11-4-04  | ADD STD. 9-5 TO REFERENCE BLOCK              |
| 2   | MFK  | 11-4-04  | NOTE 6 AND 28" MAXIMUM REMOVED, ADD 18" MIN. |
| 1   | CRM  | 10-16-03 | NOTE 6, 28" DIMENSION                        |
| NO. | CK'D | DATE     | REVISION                                     |

◀ DENOTES LATEST REVISION

NGR, STD'S  
 APPR. DATE  
 SUPERSEDES

*Bob Shulley*  
 6-15-06  
 1-47/8-18-05

## SITE PREPARATION THREE-PHASE PAD-MOUNT TRANSFORMER INSTALLATION

1-47